CNCGLASS



Green Polyester / PET Tape rolls — high-temperature tape for EVA glass lamination edge fixing

CNCGLASS Product Catalog

Green Polyester Tape for EVA Laminated Glass

Green Tape · Green Polyester Tape · GREEN PET TAPE

English

Green polyester tape for EVA laminated glass · high-temperature PET tape to prevent EVA overflow · green silicone adhesive tape for glass lamination oven.

CNCGLASS | www.cncglass.com

Price List Edition

CNC Ucolin Interlayer Technology Co., Ltd. · SHENZHEN, GD, CHINA

CNCGLASS · Price List / Specifications

Green Tape (Green Polyester / PET Tape) is a high-temperature-resistant tape used to fix pre-laminated glass with EVA film and to prevent melted EVA from overflowing through laminated glass edges in the oven when heating.

Product construction (from factory listing): 0.060 mm polyester back film + 0.038 mm silicone adhesive. Formal datasheet values appear in the Datasheet section below.

Please contact cnc@cncglass.com for pricing. Shipping may be quoted separately; a proforma invoice can include shipping when requested.

Product	Size (width × length)	Unit Price
Green Polyester / PET Tape	25 mm × 66 M/roll	**Please contact cnc@cncglass.com for pricing.**
Green Polyester / PET Tape	30 mm × 66 M/roll	**Please contact cnc@cncglass.com for pricing.**
Green Polyester / PET Tape	35 mm × 66 M/roll	**Please contact cnc@cncglass.com for pricing.**

Green Polyester / PET Tape	40 mm × 66 M/roll	**Please contact cnc@cncglass.com for pricing.**
Green Polyester / PET Tape	50 mm × 66 M/roll	**Please contact cnc@cncglass.com for pricing.**
Green Polyester / PET Tape	60 mm × 66 M/roll	**Please contact cnc@cncglass.com for pricing.**

Note: All listed lengths are 66 M per roll. Please contact cnc@cncglass.com for pricing. Shipping is quoted separately unless agreed on the proforma.

To place an order or request a quotation, please email us at cnc@cncGlass.com. Our sales team will respond promptly with availability and lead time.

CNCGLASS · Datasheet of Green Polyester Tape

Technical properties of CNCGLASS Green Polyester / PET Tape (GREEN PET TAPE). Values below are from the product datasheet for reference.

Property	Value
Color	Green
Sealant Materials	Silicone
Sealant Materials Thickness	0.035±0.005 mm
Thickness of Tape Sheet	0.06±0.005 mm
Temperature Resistance	200 ℃
Tear Strength	135 N/25 mm
Adhesive Strength	8.0 N/25 mm
Elongation	70%
Voltage Resistance	5 KV
Insulation Resistance	1,000,000 MΩ
Insulation Grade	F

Datasheet values are typical product specifications and may vary by batch. Please contact us for the latest test reports or certificates.

CNCGLASS · How to Order / Notes

Ordering process for CNCGLASS Green Polyester Tape:

1. Quantity & shipping

Confirm the quantity required and whether shipping cost should be included in the quotation.

2. Proforma invoice

We issue a proforma invoice with shipping cost (when requested) and bank account details included.

3. Payment & remittance copy

Make the payment and send us the payment copy for verification.

4. Production & shipment

We arrange production and ship once payment is confirmed, and keep you updated on shipping status.

Customization: We can customize any width within 980 mm.


MOQ: 200 rolls (mixed, in total).

CNCGLASS · Product Photos

Factory and application photographs of CNCGLASS Green Polyester / PET Tape for EVA laminated glass edge fixing and overflow prevention in the lamination oven.



Green Polyester / PET Tape roll — full-length view

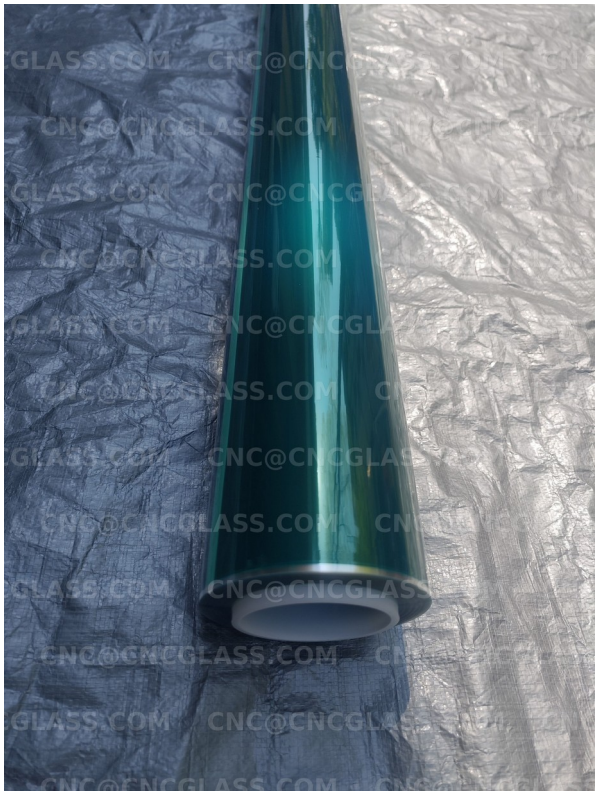

Green Polyester / PET Tape roll — end and core close-up



Green Polyester / PET Tape roll — core and film wrap close-up



Green Polyester / PET Tape roll — side view




Green Polyester Tape rolls stacked in warehouse / factory



Factory stock of polyester / PET tape rolls, including green and other colors



Factory stock of polyester / PET tape rolls — red, blue, and green

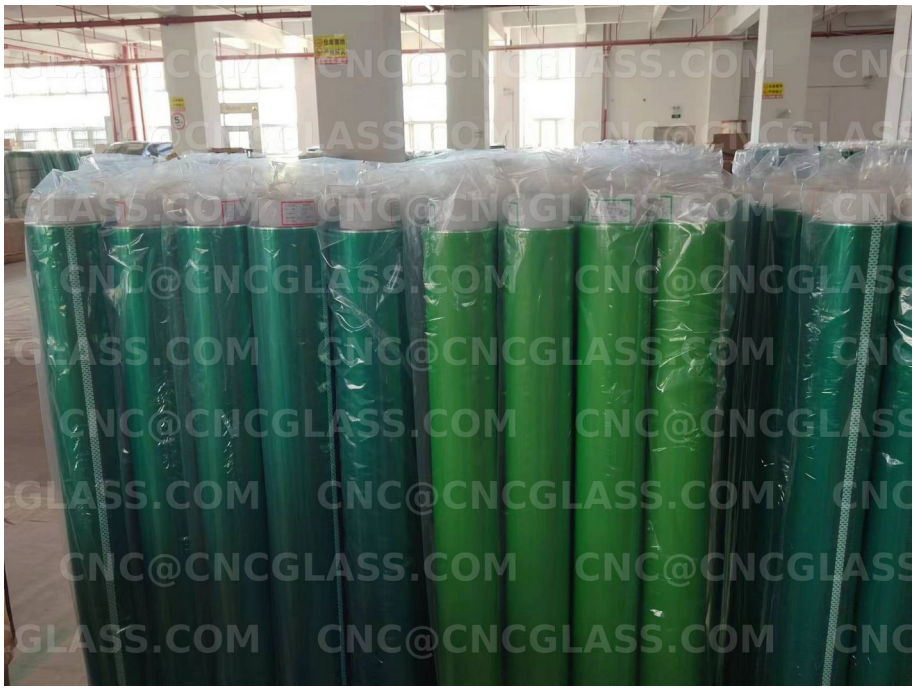

Green Polyester / PET Tape rolls in warehouse / factory aisle



Application — green PET tape on laminated glass edge



Application — green PET tape perimeter seal on glass panel



Application — green PET tape on curved / bent glass in workshop

CNCGLASS · Payment Information

Company banking details for international settlement. Please confirm remittance details with our sales contact before transfer.

BANK NAME	HSBC Hong Kong
BANK ADDRESS	1 Queen's Road, Central, Hong Kong
BANK WEBSITE	www.hsbc.com.hk
SWIFT CODE	HSBC HKH HHKH
BENEFICIARY	CNC Ucolin Interlayer Technology Co., Ltd.
ACCOUNT NO.	817 665185 838
PayPal	cnc@cncglass.com / LIN PINGDI

Please reference your company name and order reference on the remittance advice.

CNCGLASS · Contact

CNC Ucolin Interlayer Technology Co., Ltd.

Address: SHENZHEN, GD, CHINA

Peter Lin

Email: cnc@cncGlass.com

WhatsApp / Mobile: +86 15013829504

WeChat: wecan365

Website: www.cncglass.com

For quotations, samples, or bulk orders of green polyester / PET tape for EVA laminated glass, please contact us by email or WhatsApp.